

BP-SS-2 (TW-SS712) REV:A2 SATA Hot-Swap BP

SETUP GUIDE

Description:

This PCB is designed to support a single channel SATA HDD, and it's compliant to the SATA 1.0 specification [*1.5Gb/sec data transfer rate.*].


Features:

HDD Hot Swap [*PnP supports*]

External Connector for :

Power LED – [*When HDD is present*]

HDD Fail LED – [*Reserved for HDD Fail Signal Input*]

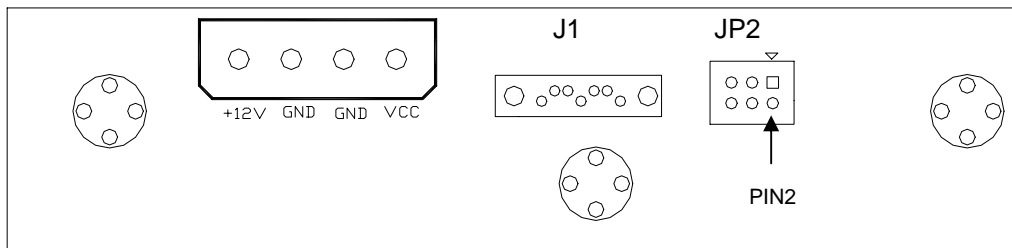

J1 : Serial ATA Connector to Host

JP2 : External LED Connector

Pin 1,3,5 for Dual color LED to indicate the HDD Power and HDD Fail signals

Pin 1 – HDD Fail LED(-)

Pin 3 – LED(+)

Pin 5 – Power LED(-)

Pin 2,4 for HDD Fail LED input

Pin 2 – Fail LED input (Active Low)

Pin 4 – GND

Pin 6 – NC

WHERE TO BUY

<http://www.rackmountnet.com>
email: sales@rackmountnet.com

2372 Qume Dr, Suite E, San Jose, CA 95131
Call us at Toll Free: 1-866-955-0598